

Cypress™ Ultrasonic Flowmeter

Ultrasonic flowmeters designed for speed and ease.



Cypress is a compact lightweight flowmeter with external power and communications for long-term flow monitoring. The Cypress Flowmeter connects with your mobile device via bluetooth and your SCADA/PLC systems—no wires or bulky electronics box. It's a single piece ultrasonic flowmeter that installs on the outside of your pipe in a snap—and senses flow through the pipe wall.

Your mobile device helps you setup the hardware and displays readings. Quick, simple installation—5 minutes from start to finish.



Fast to install, easy to use.

SoundWater Advantages

MEASUREMENTS YOU CAN TRUST

Our proprietary SoundWater Reciprocity Architecture™ prevents zero-flow drift and eliminates the need for calibration, resulting in long-term measurement stability and accuracy.

INCREASES PRODUCTIVITY

Featuring compact lightweight construction and intuitive apps—our products streamline installation, training, and setup—saving you time and money.

MADE IN USA

Locally owned and operated out of Wenatchee, Washington, our products are built with American quality and ingenuity.

WORKS IN TOUGH APPLICATIONS

Our transducers auto-adjust ultrasonic power output depending upon pipe and fluid conditions—giving you more frequent measurements when things get tough (e.g., corroded pipe or murky fluid).

LONG LIFE / LOW MAINTENANCE

SoundWater products are built to last using the highest quality materials, gasketed & double O-ring seals, and silicone gel to protect electronics.

SERVICE & ACCOUNTABILITY

We establish long-term customer relationships based on trust and service. We will respond to your needs and requests within 24 hours.

Industries



Waterparks, Pools, and Aquariums



Building Commissioning and Maintenance



Agricultural Irrigation




Building Water Management

Advantages & Features

- Long-term flow monitoring
- Connects with your SCADA/PLC
- SoundWater Reciprocity Architecture
- Auto-Adjusting Ultrasonic Power
- Mobile App for fast, intuitive setup and use
- One-piece construction; no assembly
- Gel-free transducers (optional)
- Wireless design



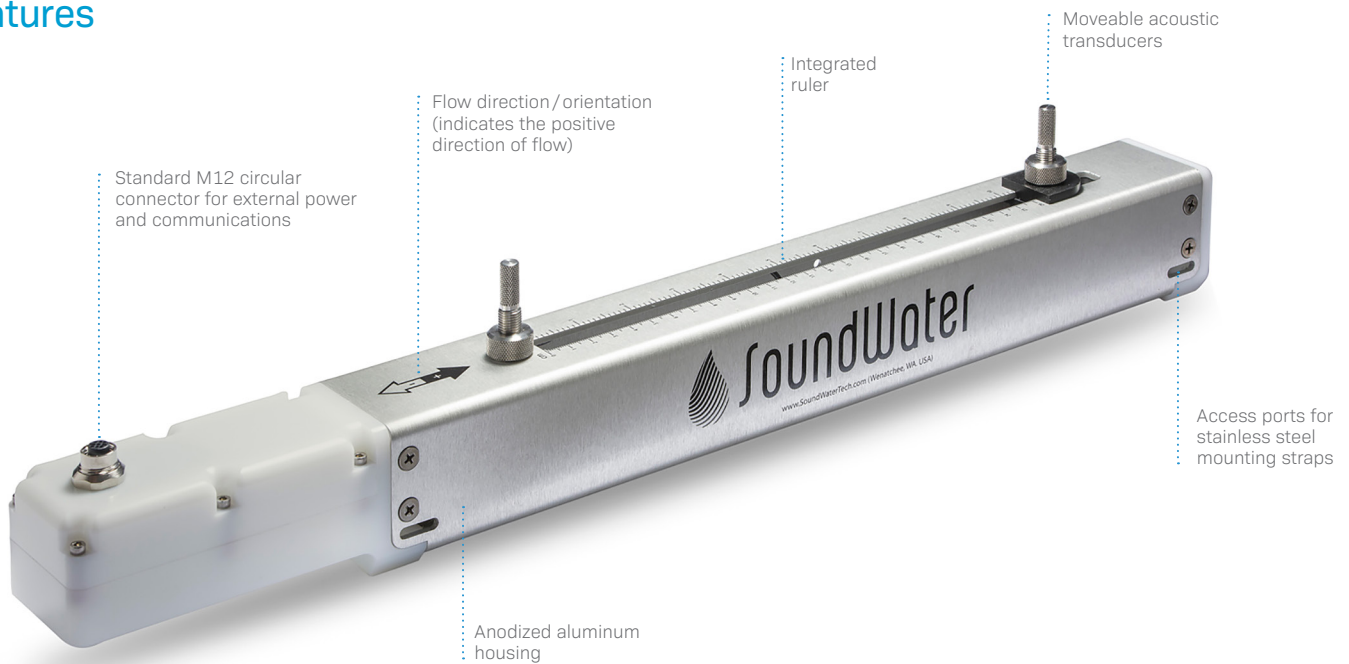


Features






Orcas App Features

Interactive smartphone/tablet control app — iOS or Android.

-  Save location information
-  Handy built-in pipe specifications — or add your own
-  Drag and drop output selection




-  English or metric units
-  Easy-to-use data logging
-  Select liner and liquid types — or define your own



Dimensions

Cypress Txx-C5

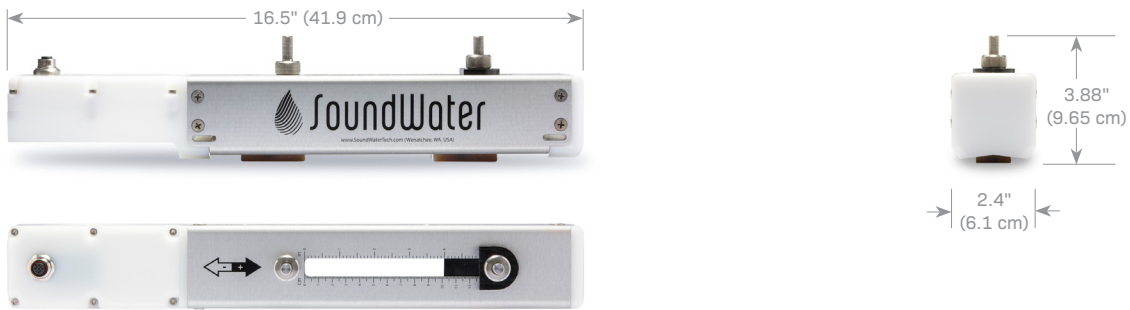

Cypress Txx-C11



Cypress Txx-CM5



Cypress Txx-CM11



Pipe Materials	Metal: Steel, Stainless Steel, Copper, Brass, Aluminum, Ductile Iron Plastic: PVC, CPVC, HDPE, LDPE, PE, PIP, FRP			
Installation	Installs on pipe from 1" to 36" nominal diameter depending on hardware selection 15 pipe diameters upstream, 5 diameters downstream for optimal performance (typical)			
Flow Detection Range	Bi-directional; 0 ft/s to 64 ft/s (0 m/s to 20 m/s)			
Performance	PIPE SIZE RANGE	ACCURACY	REPEATABILITY	
	3" to 36"	±1.0% to 2.0% typical	0.5%	
	1" to 2"	±2.0% to 3.0% typical	0.5%	
	*Under standard conditions, assuming fully developed and symmetrical flow profile (typically taken on a straight run of 15 diameters upstream and 5 diameters downstream; flow rate above 3 ft/s or 1m/s; non-aerated liquids). If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.			
Outputs (OPTIONAL)	CURRENT (4-20 mA) Current proportional to flow; user programmable. PULSE NFET (NPN type) open drain output with frequency proportional to flow; user programmable. MODBUS RTU RS485, user programmable port settings.			
Display	Flow measurements display on SoundWater Technology's Orcas™ App (iOS or Android) Mobile devices connect wirelessly to Cypress with Bluetooth 4.0 (BT LE) Metric and English units			
Data Logger	Store up to 365 days, 10,000 measurements, 50,000 datapoints			
Software	Save and recall setup information Mobile device app for iPhone, iPad, iPod Touch and Android devices			
Hardware	MODEL	PIPE SIZE RANGE	LENGTH	PIPE MATERIALS
	Cypress T31-C5	2" to 8"	16.6"	Steels, Plastics, Aluminum, FRP
	Cypress T31-C11	2" to 18"	22.6"	Steels, Plastics, Aluminum, FRP
	Cypress T41-C5	2" to 6"	16.6"	Steels, Plastics, Aluminum, FRP & Copper/Brass
	Cypress T41-C11	2" to 14"	22.6"	Copper/Brass
	Cypress T42-C5	1" to 6"	16.6"	Steels, Plastics, Aluminum, FRP & Copper/Brass
	Cypress T31-CM5*	6" to 18"	16.6"	Steels, Ductile Iron, Plastics, Aluminum, FRP
	Cypress T31-CM11*	6" to 36"	22.6"	Steels, Ductile Iron, Plastics, Aluminum, FRP
	Cypress T41-CM5	6" to 12"	16.6"	Steels, Plastics, Aluminum, FRP & Copper/Brass
	*High corrosion, large pipe or tight spaces			
Power	12-24 VDC external power for continuous use 0.6 W Typical (100 mAmp max current)			
Turndown	200:1			
Environmental	Liquid/pipe temperature -40° to 212 F (-40° to 100° C) Ambient temperature -40° to 120 F (-40° to 50° C) IP65 splash proof and weather resistant			
Materials	BODY: Anodized aluminum channel, HDPE & PVC electronics housing and footings MOUNTING STRAPS: Stainless Steel FASTENERS: Stainless steel HARDWARE: Stainless steel, acetal CONNECTOR: M12, nickel plated brass			
Flowmeter Kit	Flowmeter, silicone based coupling gel, mounting straps, power-communication cable			
Manufacture	SoundWater Technologies, Wenatchee WA, USA			
Zero Stability	Reciprocity based hardware for measurement stability and low flow performance.			
Auto-Ranging	Auto-adjusting ultrasonic transducer power, and auto-adjusting transducer receiver gain. Maximizes usable signal and measurement quality.			
Technology	Transit Time Ultrasonic			